


Installation of the icom Data Suite – iDS

1. Open the web interface of your icom OS router
2. Switch to "Help" -> "Wizards"
3. Select "Install icom Data Suite / Container".
4. "Install icom Data Suite / container" -> Selection of the installation source
-> "Automatic download from the Internet" -> Choice between "INSYS Update Server" (only with an existing Internet connection) or your own update server
-> "Manual upload" (current file can be downloaded from the following link: <https://icom-data-suite.releasenotes.io/>)
5. "Select software licence (if available)"
-> **No license is required to activate the free trial period.**
->Click on "Browse" and select the license package (ids_license_<s/n>.tar, e.g. ids_licence_12345678.tar).
6. "Extended container settings (usually not necessary for icom Data Suite)"
->If the Extended container settings checkbox is checked, the preselected container configuration can be adjusted.
->The container gets its own network interface, which is added to the selected IP network of the router. The container can be reached from outside in the selected network at the specified static IPv4 address. The IP address should be in the network of the selected IP network. All local network interfaces of the router that are configured in local network or Ethernet operating mode, are activated and have at least one active static IPv4 address are available here.
-> **The first available IP network and its static IP address +9 (decimal) are used for the preselected configuration; With routers of the SCR and ECR series, the IP address 192.168.1.10 is permanently preselected.**
7. Press the "Execute Wizard" button.

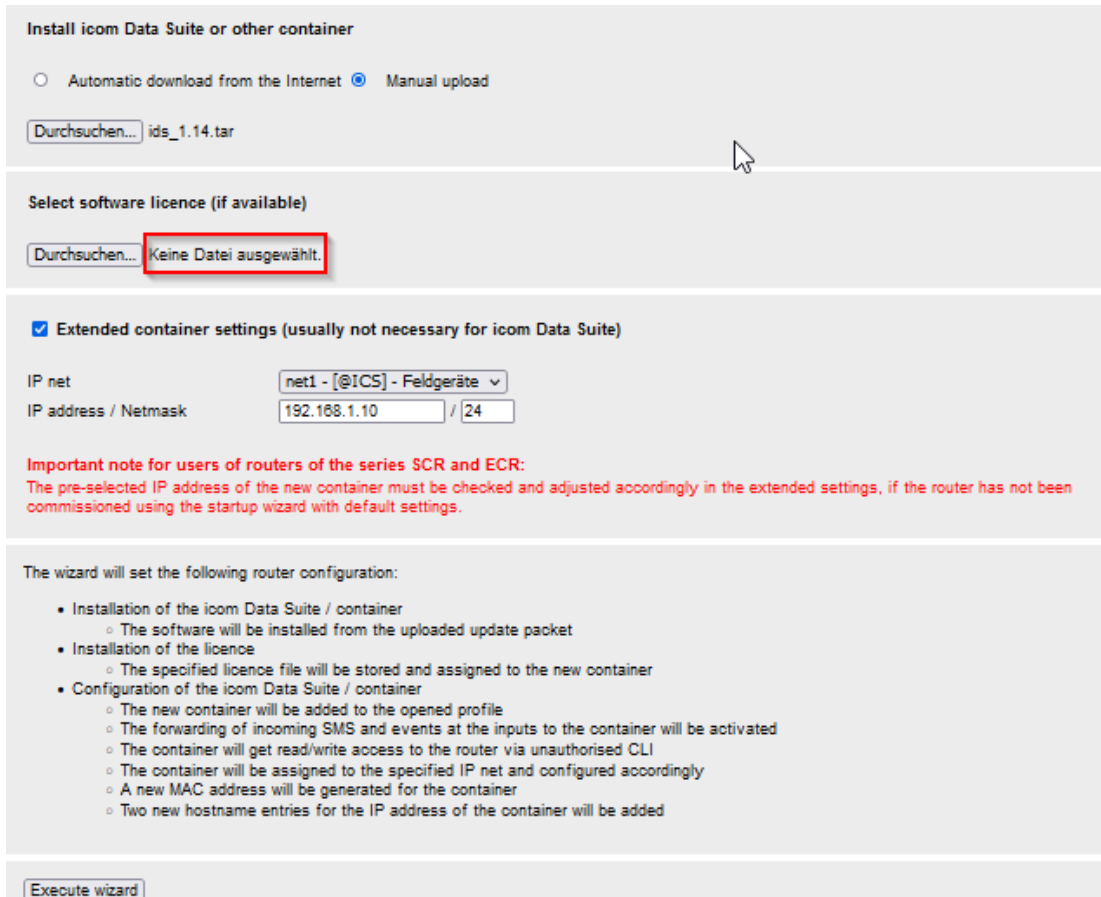

The screenshot shows the 'Install icom Data Suite or other container' wizard. It has three main sections:

- Installation Source:** Radio buttons for 'Automatic download from the Internet' (unselected) and 'Manual upload' (selected). A file browser shows 'ids_1.14.tar'.
- Software Licence:** A 'Durchsuchen...' button is followed by the text 'Keine Datei ausgewählt.' (No file selected).
- Extended container settings:** A checkbox is checked. Below it, 'IP net' is set to 'net1 - [@ICS] - Feldgeräte' and 'IP address / Netmask' is '192.168.1.10 / 24'.

An important note in red text states: 'Important note for users of routers of the series SCR and ECR: The pre-selected IP address of the new container must be checked and adjusted accordingly in the extended settings, if the router has not been commissioned using the startup wizard with default settings.'


At the bottom, a list of actions the wizard will perform is shown, including installation of the software and licence, and configuration of the container's network and hostnames. An 'Execute wizard' button is at the very bottom.

Check installation (licensed version only)

1. Open a new tab in the Internet browser and enter and confirm the IP address of the icom Data Suite (default: 192.168.1.10) or click on the IP address link after the wizard has ended.
2. Login with name (default: insys) and password (icom)
3. Open the Status > Overview page and check the software version of the icom Data Suite to verify a successful installation
4. Open the Status > License page to check the license scope

Start the 45 day trial period

1. Open a new tab in the Internet browser and enter and confirm the IP address of the icom Data Suite (default: 192.168.1.10) or click on the IP address link after the wizard has ended.
2. Press the "Start test period" button.

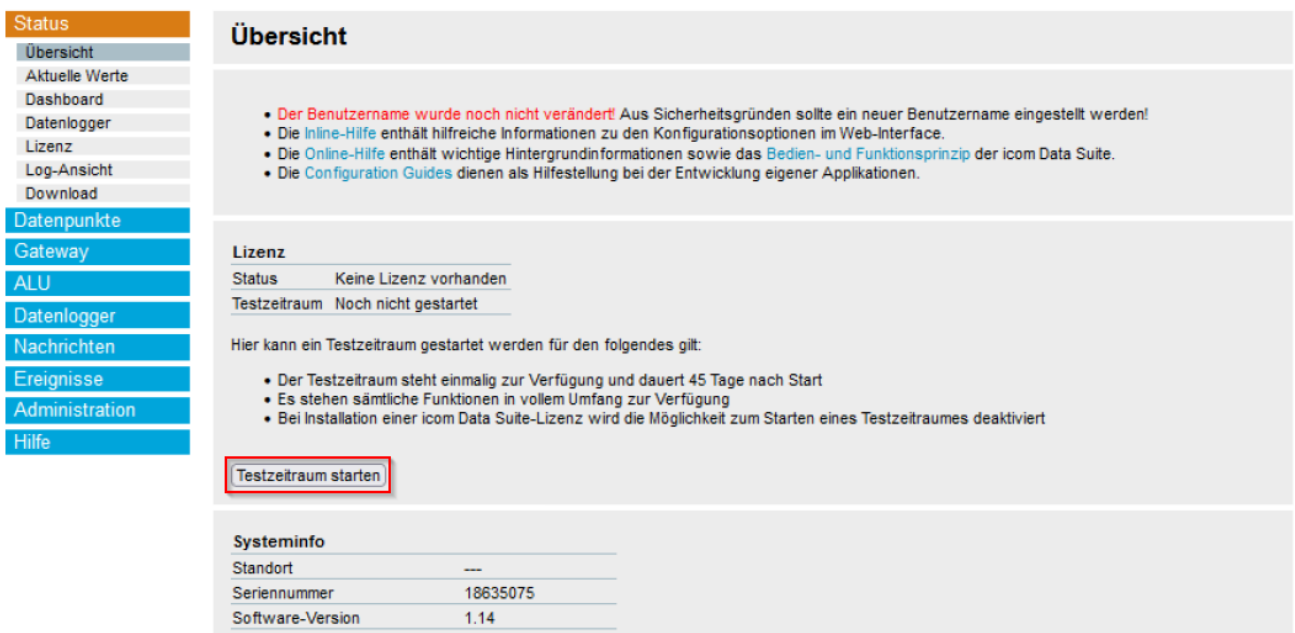

Status

- Übersicht
- Aktuelle Werte
- Dashboard
- Datenlogger
- Lizenz
- Log-Ansicht
- Download
- Datenpunkte**
- Gateway
- ALU
- Datenlogger
- Nachrichten
- Ereignisse
- Administration
- Hilfe

Übersicht

- **Der Benutzername wurde noch nicht verändert!** Aus Sicherheitsgründen sollte ein neuer Benutzername eingestellt werden!
- Die [Inline-Hilfe](#) enthält hilfreiche Informationen zu den Konfigurationsoptionen im Web-Interface.
- Die [Online-Hilfe](#) enthält wichtige Hintergrundinformationen sowie das [Bedien- und Funktionsprinzip](#) der icom Data Suite.
- Die [Configuration Guides](#) dienen als Hilfestellung bei der Entwicklung eigener Applikationen.

Lizenz

Status	Keine Lizenz vorhanden
Testzeitraum	Noch nicht gestartet

Hier kann ein Testzeitraum gestartet werden für den folgendes gilt:

- Der Testzeitraum steht einmalig zur Verfügung und dauert 45 Tage nach Start
- Es stehen sämtliche Funktionen in vollem Umfang zur Verfügung
- Bei Installation einer icom Data Suite-Lizenz wird die Möglichkeit zum Starten eines Testzeitraumes deaktiviert

Testzeitraum starten

Systeminfo

Standort	---
Seriennummer	18635075
Software-Version	1.14